



DH-SVR2 (Two in one)

in Bearbeitung

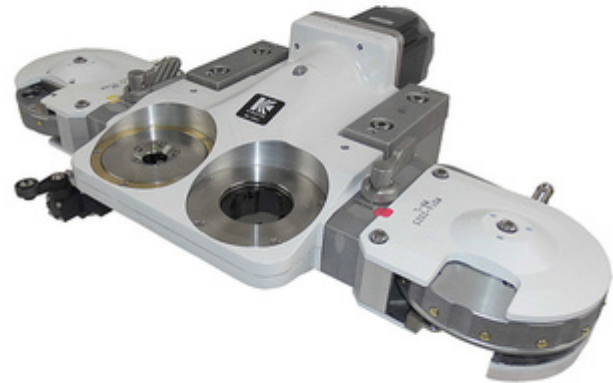

Auto Tip Dressers

in Bearbeitung

Details

	Indication in DWG	
Revolution (rpm)		1500 – 2000 in practical use
Rated torque (N)		More than 5.6
Flange diameter (mm)	A	φ95 or φ110
Shaft diameter (mm)	B	φ19
Shaft length from flange (mm)	C	More than 50, less than 59 from flange
Effective shaft length (mm)	D	Shaft with 44mm straight area
Capacity outer diameter (mm)	E	□135
Mounting pitch (mm)	F	PCD145 or 115
Mounting screw (mm)		4×M8
Floating stroke (mm)		Max.40

*Please arrange servomotor to use this product.

